

## Power Down the Powerbank

### Manually Power Down

- Long press on the Power button **1** to power off the Powerbank.

### Activate Auto Shut Off

- Rapidly press the power button **1** four (4) times to enable/disable auto shut off.

## Charging the Powerbank

The Powerbank may be recharged in a variety of ways

### With the Included USB-C Charger

1. Select and connect the correct wall plug to the charger.



Included wall plugs are:

- Type A (North America, Japan) (built in)
- Type C (Europe, South America, Asia)
- Type G (U.K.)

2. Connect the USB-C side of the included cable to the USB-C IN/OUT **5** on the Powerbank.
3. Connect the USB-C side of the included cable to the charger.
4. Connect the charger to an electrical outlet and charge the Powerbank until the battery is fully charged.

### With Other Charger

If the Powerbank is recharged in any other way, make sure that the output voltage of the charger falls within these ranges:

- DC Output 4.5V - 36V, Up to 3A (2W - 45W)
- USB-C Output: 40W




The Powerbank only accepts 5.5 x 2.1 mm barrel plugs.

## Quick Guide — Powerbank for I-Series I-13 / I-16

Capacity: 25600 mAh

### Ports

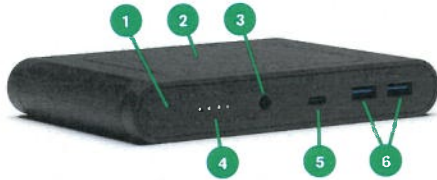

1. Power Button / Voltage Selector
2. Wireless Charging
3. DC IN/OUT
4. Battery & Voltage Indicator
5. USB-C IN/OUT
6. USB-A OUT

### Set Correct Power Output

**!** It is very important that the correct power output voltage is set before connecting the Powerbank to any device. Using the wrong voltage can damage your device.

#### Setting Correct Power Output for I-Series I-13 / I-16

1. Long press on the Power button **1** to power on the Powerbank.
2. Double press on the Power button **1** to enter DC output mode.
3. Single press on the Power button **1** until the **19V** LED is on.



### Charging the I-Series I-13 / I-16

**i** Follow these steps every time the Powerbank is used.

1. Connect the 2.1 mm angled barrel plug side of the power cable to the DC IN/OUT **3** on the Powerbank.



2. Long press on the Power button **1** to power on the Powerbank.
3. Double press on the Power button **1** to enter DC output mode.
4. Make sure that power output is set to 19V.  
To change power output, see *Setting Correct Power Output for I-Series I-13 / I-16*.
5. Connect the 2.5 mm straight barrel plug side of the power cable to the I-Series I-13 / I-16 Power Connector.